

ViziPrint®

Impress White

Our printable window film is designed for trouble-free installation of graphics on glass surfaces. ViziPrint® Impress White utilizes hybrid adhesive technology that creates a strong bond in both high and low temperatures without leaving residue behind. This adhesion technology also eliminates bubbling and is unaffected by moisture. Since it uses a mechanical bond to gently adhere images to windows, the glass stays clear and graphics stay bright whenever ViziPrint® Impress White is re-positioned and re-applied. The film is ideal for high quality decals, signage and retail window advertising.

- IDEAL FOR INTERIOR & SHORT TERM OUTDOOR PROMOTIONS
- EASY TOOL & BUBBLE FREE APPLICATION
- CAN BE REMOVED WITHOUT LEAVING ADHESIVE RESIDUE

4.6
mil

Ultra
White
PET


Gloss



(Eco) Solvent
Latex
UV



Hybrid
Adhesive
Technology



Widths up to 54 in

YEARS DURABILITY
3

INTERIOR

YEARS DURABILITY
2


EXTERIOR*

BEAUTIFULLY DISPLAY VIVID GRAPHICS



APPLICATIONS

Smooth Flat Surfaces
Retail Displays
Window Graphics
Decals & Stickers

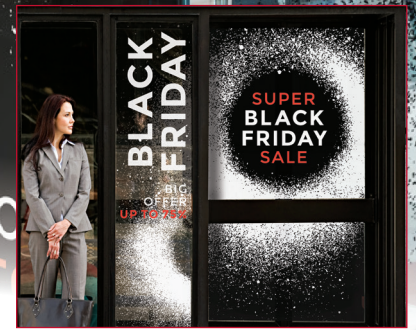

Certified for
HP Latex Inks

SONOMA
GRAPHIC
PRODUCTS
www.sgpweb.com

Impress White

ViziPrint® Impress White is a 4.6 mil (115µ) ultra white PET film with a hybrid adhesive technology that is protected by a clear, 1 side siliconized release liner. Its hybrid adhesive technology creates a strong bond in both high and low temperatures without leaving residue behind, eliminates bubbling and is unaffected by moisture. ViziPrint® Impress White can be re-positioned and re-applied multiple times and removes cleanly up to 3 years after installation.

- IDEAL FOR APPLICATIONS ON GLASS AND OTHER SMOOTH, FLAT SURFACES
- IDEAL FOR INTERIOR & SHORT TERM OUTDOOR PROMOTIONS
- CAN BE USED ON ELECTRONIC EQUIPMENT, SUCH AS TV SCREENS, IPAD/TABLET DISPLAYS AND COMPUTER MONITORS, AS WELL AS REFRIGERATORS, GLASS DISPLAY CASES.

INSTALLATION

RECOMMENDATION

Wet or dry installation will work for ViziPrint® Impress White. Please see ViziPrint® Impress White installation instructions for further details. The surface must be clean and smooth and free of defects before application.

PRINTING RECOMMENDATIONS

- Handle material with care prior to printing; use gloves to avoid fingerprints.
- Printing temperature should be 59-86°F (15-30°C) with 30-60% humidity.
- Set printer to highest print setting for optimal print quality.
- If mounting on glass or backlit substrates, evaluate color density of the print on a window or in transmitted light.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

| | |
|---------------|----------------------------|
| Film | Ultra White PET |
| Adhesive | Hybrid Adhesive Technology |
| Release Liner | Siliconized 1 Side PET |

PRODUCT CHARACTERISTIC

| | |
|---------------------------|--|
| Film Thickness | 4.6 mil (115µ) |
| Outdoor Durability | 2 Years (ink dependent; see warranty for more details) |
| Application Temperature | >23°F (-5°C) |
| Service Temperature Range | -4°F to 248°F (-20°C to 120°C) |
| Stretching Temperature | 140°F - 176°F (60°C - 80°C) |
| Melting Temperature | 498°F (259°C) |
| Shelf Life | 2 years |
| Storage Conditions | 59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity |

SONOMA
GRAPHIC
PRODUCTS
www.sgpweb.com

To place an order or for more info, contact your local sales rep:

Northern CA
Doug King
408.701.7202
Central/Southern CA/Hawaii
Sommer Della Bitta
916.947.2602
Southern CA
Dereck Cruz
626.201.8932

Washington/Oregon
Chuck Vandervort
206.235.4191
Pam Pare
503.317.6759
Destinee Vaughn
503.713.1368

SONOMA
GRAPHIC
PRODUCTS www.sgpweb.com